




(630) 833-0300  
(630) 834-9427 (fax)  
chi\_sales@mcmaster.com  
Text 75420


**Stainless Steel Heavy Duty Push-Button Quick-Release Pin**  
1" Diameter, 2" Usable Length

In stock  
\$99.62 Each  
90980A840

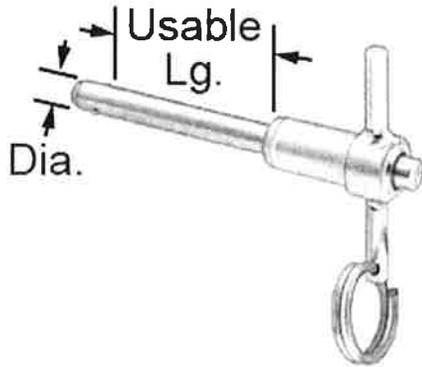

Usable Length	2"
Additional Specifications	1" Dia.—Breaks at 147,000 lbs.

Also known as ground handling pins, these corrosion-resistant, extra-rugged pins have a handle welded directly to the head. Diameter tolerance is -0.003" to -0.0015". Pin diameter equals hole size. Handle and push button are 18-8 stainless steel; shaft is 17-4 stainless steel. Rockwell hardness is C40. Breaking strength is measured as double shear, which is the force required to break a pin into three pieces. Meet NASM 23460. Split ring included.

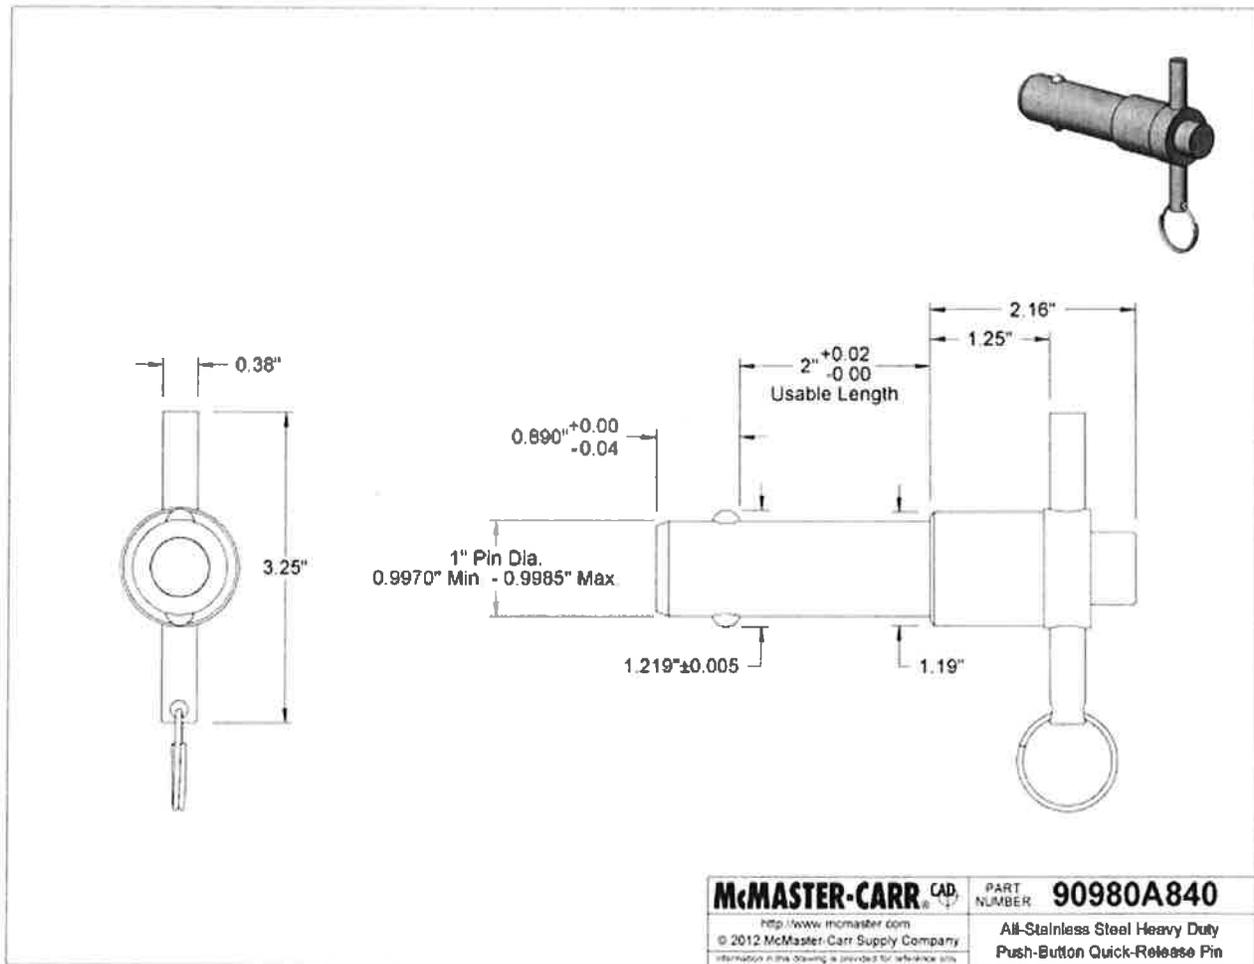

The information in this 3-D model is provided for reference only.